





Certificata ISO 9002  
Centro taratura SIT **JTC**

ELSI s.r.l. - via Milano, 11 - 20020 Lainate (MI)  
Tel.: (02) 9370868 / 9373042 - Fax: (02) 9371724  
Home page: www.elsi.it • e-mail: info@elsi.it

## Sensors for pharmac. and medical purposes

**L6** Vacuum- and steamproof straight MgO RTD, 6mm sheath o.d.

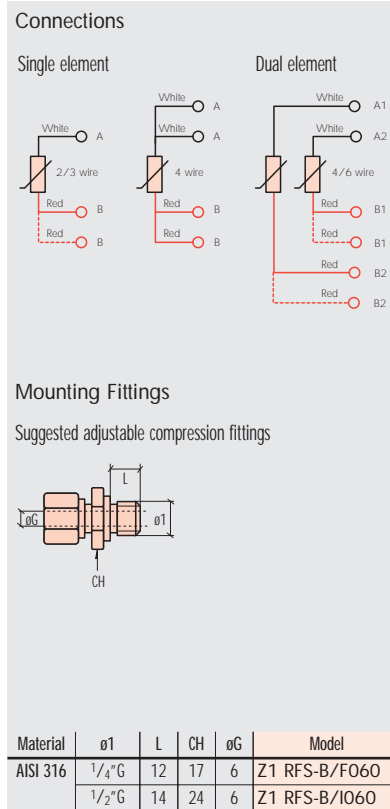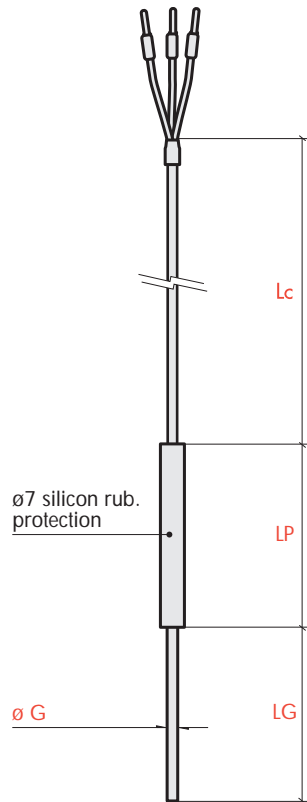

Type of wire	Diam. øG mm	Base code	Value in Ω à 0°C	Element N° and limits	Type sonde thermométrique	Sheath material	Sheath LG mm	Type of thread	Protection LP mm	Lc wire length m	Type of termination
TS 0 200°C max	6	L6 D60	P Pt100 DIN - IEC	0 3-wire single el. Cl. B (1 DIN)	O Ceramic 750 °C max	B AISI 316	0100	S Sans	10 100	10 1	P Terminals ø 1.4 - 1.8 max
				1 3-wire single el. Cl. A (1/2 DIN)			0150			05 0.5	S Insul. and tinned leads
				2 3-wire single el. 1/3 DIN			0200			15 1.5	F Faston 6.35
				3 4-wire single el. Cl. A (1/2 DIN)			0250			20 2	D Miniature plug
				4 4-wire single el. 1/3 DIN			0300			25 2.5	G Standard plug
				6 6-wire dual el. Cl. B (1 DIN)			0350			30 3	J Cylindrical plug ø 17
				7 6-wire dual el. Cl. A (1/2 DIN)			0400			35 3.5	R Male ø 12 cylindric plug
				8 6-wire dual el. 1/3 DIN			0450			40 4	
							0500			45 4.5	
							L min 0100			50 5	
										00 10	

Note: other lengths on request for LG, LE and Lc. Code ex.: LG = 135mm cod. 0135 / LE = 60mm cod. 06 / Lc = 7m cod. 70

**Reference model:**

Straight RTD with Ts 0 wire, 6mm sheath o.d.,  
3-wire Pt100 single element, class B (1 DIN) accuracy,  
ceramic element, AISI 316 sheath, 100mm length,  
100mm protection, 1m wire and 1.8mm ø terminals.

**L6 D60 - P 0 0 - B 0100 - S 10 - 10 P**

□ - □ □ □ - □ □ □ - □ □ □ - □ □ □

PRICE LIST

PRINT